FEATURES

- Avalanche Rugged Technology
- Rugged Gate Oxide Technology
- Lower Input Capacitance
- Improved Gate Charge
- Extended Safe Operating Area
- Lower Leakage Current : 25 μA (Max.) @ V_{DS} = 800V
- Low $R_{DS(ON)}$: 3.800 Ω (Typ.)

BV_{DSS} = 800 V

$R_{DS(on)}$ = 4.8 Ω

I_D = 2 A

TO-220F



1.Gate 2. Drain 3. Source

Absolute Maximum Ratings

Symbol	Characteristic	Value	Units
V_{DSS}	Drain-to-Source Voltage	800	V
I_D	Continuous Drain Current (T_C=25 ℃)	2	A
	Continuous Drain Current (T_C=100 ℃)	1.3	
I_{DM}	Drain Current-Pulsed ①	12	A
V_{GS}	Gate-to-Source Voltage	±30	V
E_{AS}	Single Pulsed Avalanche Energy ②	235	mJ
I_{AR}	Avalanche Current ①	2	A
E_{AR}	Repetitive Avalanche Energy ①	3.5	mJ
dv/dt	Peak Diode Recovery dv/dt ③	2.0	V/ns
P_D	Total Power Dissipation (T_A=25 ℃) *	35	W
	Total Power Dissipation (T_C=25 ℃)	0.28	W
	Linear Derating Factor		W/℃
T_J , T_{STG}	Operating Junction and Storage Temperature Range	- 55 to +150	℃
T_L	Maximum Lead Temp. for Soldering Purposes, 1/8" from case for 5-seconds	300	

Thermal Resistance

Symbol	Characteristic	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case	--	3.57	℃/W
$R_{\theta JA}$	Junction-to-Ambient	--	62.5	

SAMSUNG ELECTRONICS

Electrical Characteristics (T_C=25℃ unless otherwise specified)

Symbol	Characteristic	Min.	Typ.	Max.	Units	Test Condition
BV_{DSS}	Drain-Source Breakdown Voltage	800	--	--	V	V_{GS}=0V,I_D=250μA
$\Delta BV/\Delta T_J$	Breakdown Voltage Temp. Coeff.	--	1.01	--	V/℃	I_D=250μA *See Fig 7*
$V_{GS(th)}$	Gate Threshold Voltage	2.0	--	3.5	V	V_{DS}=5V,I_D=250μA
I_{GSS}	Gate-Source Leakage , Forward	--	--	100	nA	V_{GS}=30V
	Gate-Source Leakage , Reverse	--	--	-100		V_{GS}=-30V
I_{DSS}	Drain-to-Source Leakage Current	--	--	25	μA	V_{DS}=800V
		--	--	250		V_{DS}=640V,T_C=125℃
$R_{DS(on)}$	Static Drain-Source On-State Resistance	--	--	4.8	Ω	V_{GS}=10V,I_D=0.85A ④*
g_{fs}	Forward Transconductance	--	1.78	--	℧	V_{DS}=50V,I_D=0.85A ④
C_{iss}	Input Capacitance	--	580	750	pF	V_{GS}=0V,V_{DS}=25V,f =1MHz *See Fig 5*
C_{oss}	Output Capacitance	--	60	75		
C_{rss}	Reverse Transfer Capacitance	--	23	30		
$t_{d(on)}$	Turn-On Delay Time	--	16	40	ns	V_{DD}=400V,I_D=2A, R_G=16 Ω *See Fig 13* ④⑤
t_r	Rise Time	--	26	60		
$t_{d(off)}$	Turn-Off Delay Time	--	46	100		
t_f	Fall Time	--	24	60		
Q_g	Total Gate Charge	--	27	35	nC	V_{DS}=640V,V_{GS}=10V, I_D=2A *See Fig 6 & Fig 12* ④⑤
Q_{gs}	Gate-Source Charge	--	5.3	--		
Q_{gd}	Gate-Drain("Miller") Charge	--	12.2	--		

Source-Drain Diode Ratings and Characteristics

Symbol	Characteristic	Min.	Typ.	Max.	Units	Test Condition
I_S	Continuous Source Current	--	--	2	A	Integral reverse pn-diode in the MOSFET
I_{SM}	Pulsed-Source Current ①	--	--	12		
V_{SD}	Diode Forward Voltage ④	--	--	1.4	V	T_J=25 ℃,I_S=2A,V_{GS}=0V
t_{rr}	Reverse Recovery Time	--	330	--	ns	T_J=25 ℃,I_F=3A
Q_{rr}	Reverse Recovery Charge	--	1.52	--	μC	di_F/dt=100A/μs ④

Notes ;

- • Repetitive Rating : Pulse Width Limited by Maximum Junction Temperature
- • L=110mH, I_{AS}=2A, V_{DD}=50V, R_G=27Ω, Starting T_J=25 ℃
- • I_{SD}≤3A, di/dt≤100A/μs, V_{DD} ≤BV_{DSS}, Starting T_J=25 ℃
- • Pulse Test : Pulse Width = 250μs, Duty Cycle ≤2%
- • Essentially Independent of Operating Temperature

7964142 0040528 38T

Fig 1. Output Characteristics

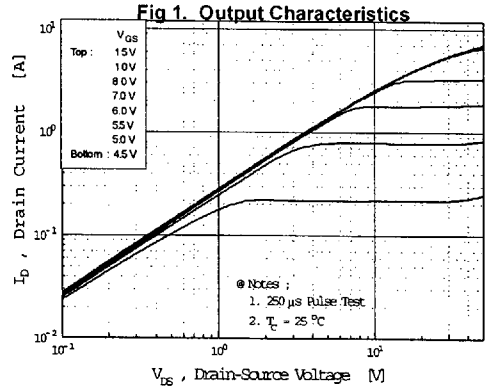

Fig 2. Transfer Characteristics

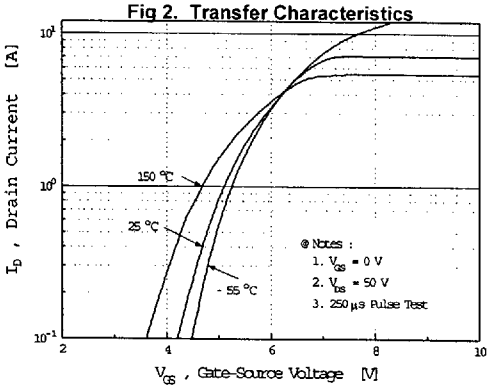

Fig 3. On-Resistance vs. Drain Current

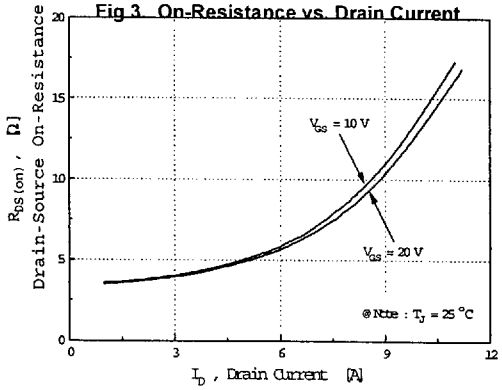

Fig 4. Source-Drain Diode Forward Voltage

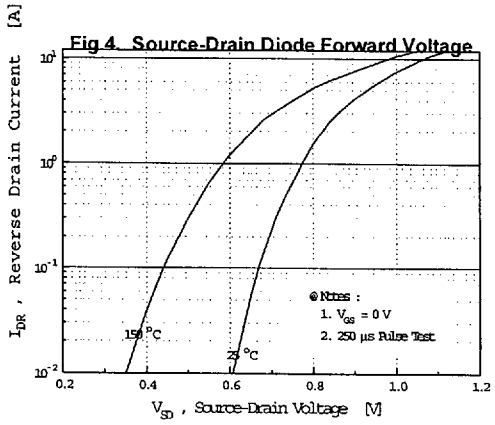

Fig 5. Capacitance vs. Drain-Source Voltage

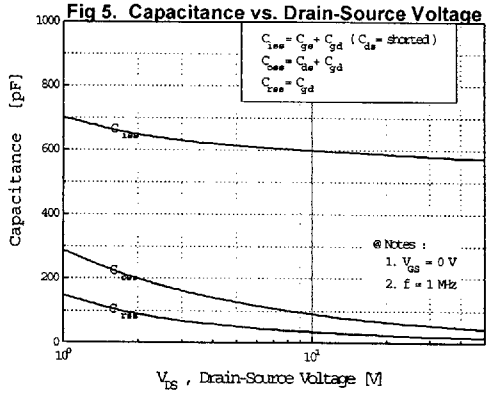

Fig 6. Gate Charge vs. Gate-Source Voltage

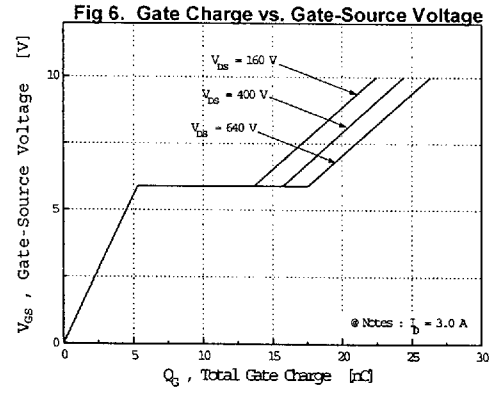

7964142 0040529 216

Fig 7. Breakdown Voltage vs. Temperature

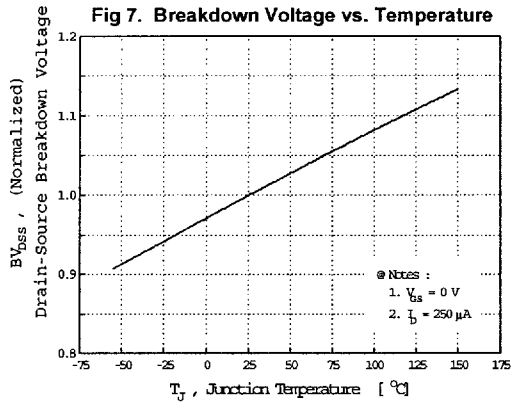

Fig 8. On-Resistance vs. Temperature

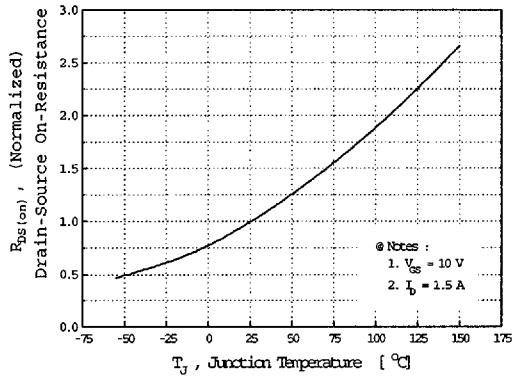

Fig 9. Max. Safe Operating Area

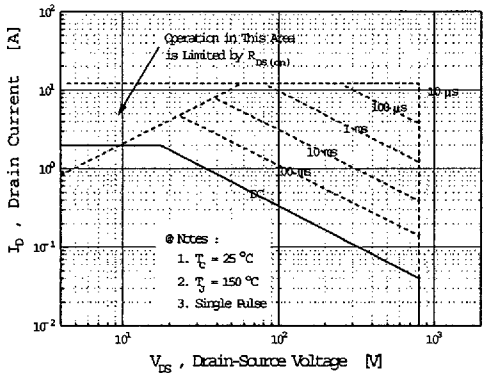

Fig 10. Max. Drain Current vs. Case Temperature

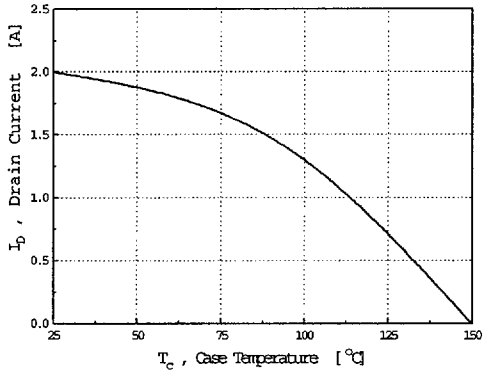

Fig 11. Thermal Response

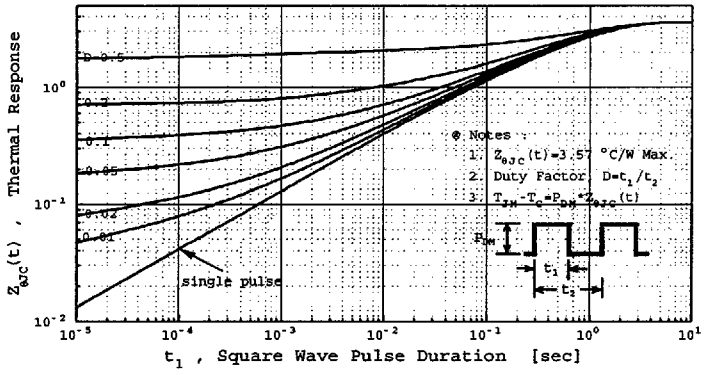

Fig 12. Gate Charge Test Circuit & Waveform

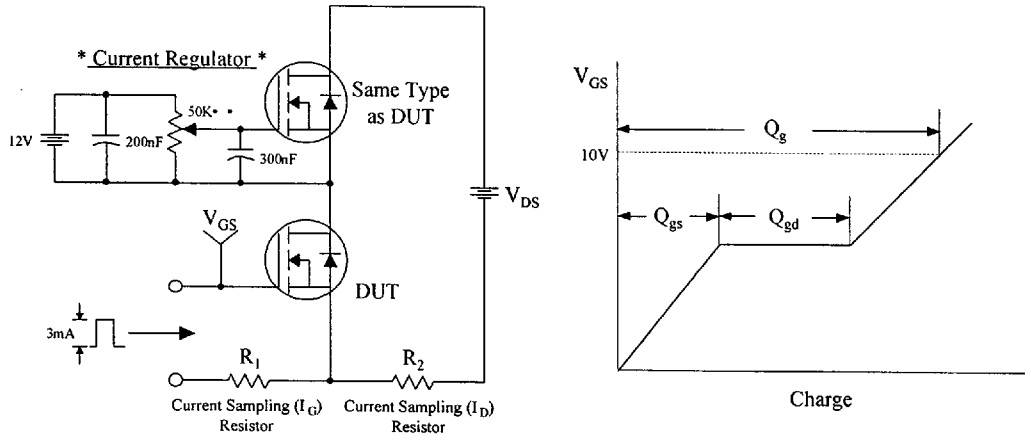

Fig 13. Resistive Switching Test Circuit & Waveforms

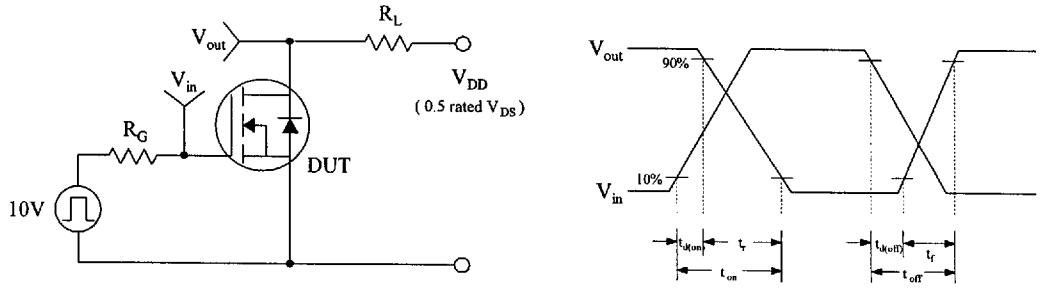

Fig 14. Unclamped Inductive Switching Test Circuit & Waveforms

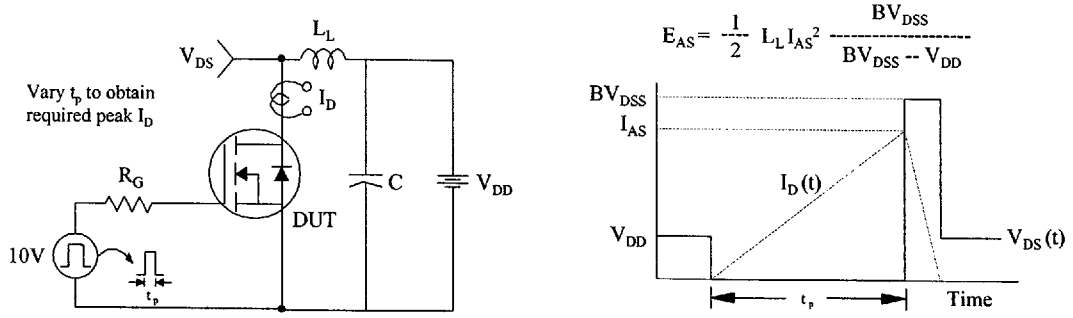

7964142 0040531 974
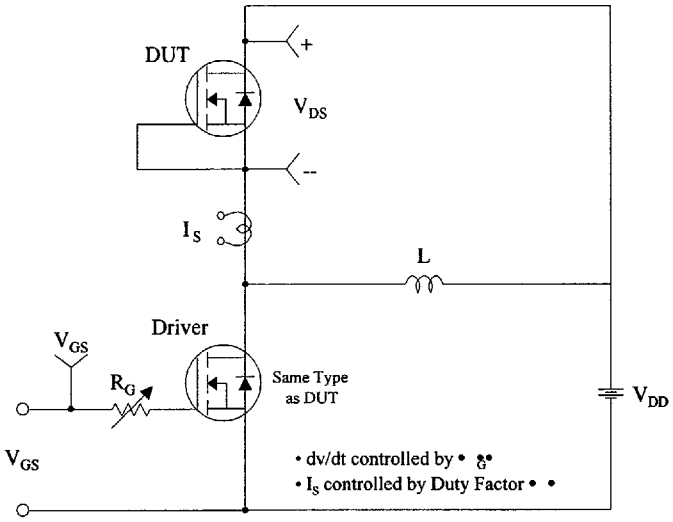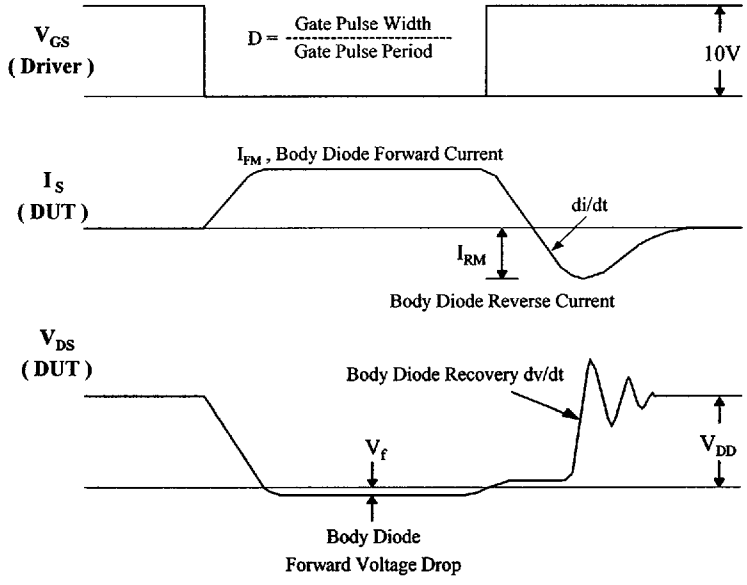
Fig 15. Peak Diode Recovery dv/dt Test Circuit & Waveforms